

Specifications

ID TOOLS

2D	Data Matrix, QR Code, MicroQR Code
Bar code	EAN13, UPC-A, EAN8, UPC-E, Interleaved 2 of 5, Code 39, Code 128, Code 93

VERIFICATION STANDARDS

AIM DPM Mark Quality Standard

IMAGE

Sensor	1280 x 960 high-resolution pixel array
--------	--

LIGHTING/OPTICS

Illumination	Integrated diffuser; bright- and dark-field LED's
Reading direction	Omni-directional, pitch and skew (off-axis) angles up to 35 degrees
Aiming	Horizontal green light bar aimed at center of field of view

I/O

Trigger	Via trigger switch in the handle
Additional outputs	Multifunctional LED and beeper to indicate good read, device status, or errors

COMMUNICATIONS

Interfaces	
7500/7500LR/7500V	USB and/or RS-232 for data communication, set-up, and image preview. PS2 keyboard wedge, PS2 or USB keyboard emulation

COMMUNICATIONS (cont.)

7550/7550LR/7550V	Reader to base station: Bluetooth class 2 (10m range) Base station to PC: USB/RS-232/PS2
-------------------	--

POWER

Electrical requirements	
7500/7500LR/7500V	5VDC, 5 watts
7550/7550LR/7550V	9VDC, 18 watts

Battery

7550/7550LR/7550V	Eight hours normal use fully charged at 25°C (77°F)
-------------------	---

MECHANICAL

Dimensions*	Height: 175mm (6.9in) Width: 134mm (5.3in) Depth: 81mm (3.3in)
Verifier standoff depth	15mm (0.6in)
Material	Polycarbonate housing with shock-absorbing rubber overmold

Weight

7500/7500LR/7500V**	270g (9.6oz)
7550/7550LR/7550V**	Reader (with battery): 330g (11.7oz) Base: 250g (8.8oz)

* Orientation with camera axis horizontal, verifier standoff not attached



** Verifier standoff not attached. Additional verifier standoff weight: 15g (.48oz)

ENVIRONMENTAL

Operating temperature	
7500/7500LR/7500V	-10°C to +50°C (14°F to +122°F)
7550/7550LR/7550V	0°C to +50°C (32°F to +122°F)
Storage temperature	
7500/7500LR/7500V	-40°C to +70°C (-40°F to +158°F)
7550/7550LR/7550V	-40°C to +60°C (-40°F to +140°F)
Charging temperature	0°C to +40°C (32°F to +104°F)
Operating humidity	0% – 95%, non-condensing
Storage humidity	0% – 95% non-condensing
Drop test	
7500/7500LR/7500V*	50 drops from 2 meters onto concrete
7550/7550LR/7550V*	25 drops from 2 meters onto concrete * Verifier standoff not attached.
Certifications	CE, (FCC, UL, and CSA pending) Please check with your Cognex sales engineer regarding the regulatory status of models 7550 and 7550LR in countries other than the US, Europe, Japan and Canada.
IP rating	Reader: IP54 Base station: IP41

SYSTEM REQUIREMENTS

Microsoft Windows XP, 64MB of memory (RAM)

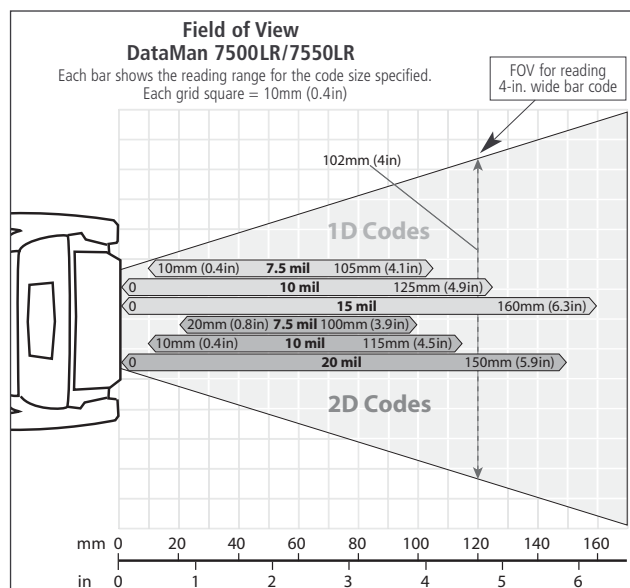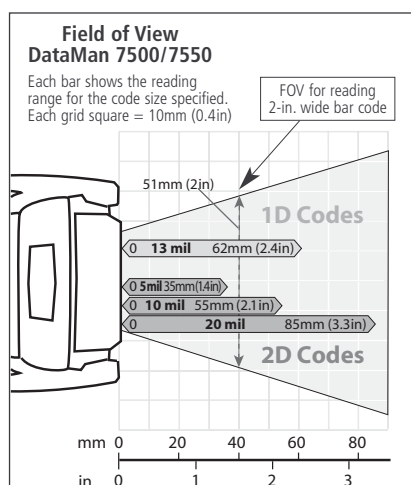

COGNEX

Corporate Headquarters
Cognex Corporation
One Vision Drive
Natick
MA 01760-2059
USA
Tel: 508-650-3000
Fax: 508-650-3344
www.cognex.com

United States

Natick, Massachusetts

Nashville, Tennessee

Detroit, Michigan

Chicago, Illinois

Mountain View, California

www.cognex.com

508-650-3000

615-844-6158

248-668-5100

630-649-6300

650-969-4812

Europe

France
Germany
Ireland
Italy
Netherlands
Spain
Sweden
Switzerland
United Kingdom

www.cognex.net

+33 1 4777 1550
+49 721 6639 0
+353 1 825 4420
+39 02 6747 1200
+31 402 668 565
+34 93 445 67 78
+46 21 14 55 88
+41 71 313 06 05
+44 1908 206 000

Canada

Japan

Asia
China
Korea
Singapore
Taiwan

www.cognex.com

905-634-2726
www.cognex.co.jp
+81 3 5977 5400
www.cognex.net
+86 21 6320 3821
+82 2 539 9047
+65 632 55 700
+886 3 578 0060